
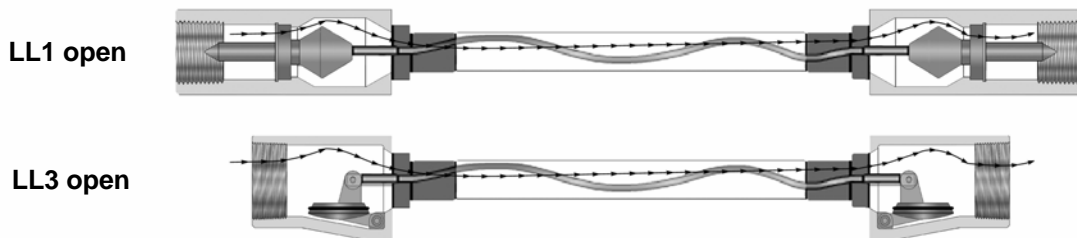


Smart-Hose™**FLUID SYSTEMS**

ENGINEERING DATA

S02 Transfer Hose

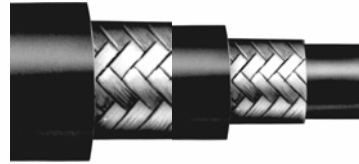

The Smart-Hose safety system is built into a special rubber Sulfur Dioxide discharge hose. Common uses include in-plant processing, truck and rail car loading. This low temperature hose has been uniquely developed to meet the rugged requirements of this application.

Hose Data

- Cover** Black, Special low temperature abrasions resistant co-polymer
- Reinforcement** 2 layers of stainless steel wire braid
- Tube** Black, Special low temperature co-polymer resistant to S02 permeation
- Branding** Yellow Mylar brand - S02 Discharge
- Temperature** -5° to 185° F (-20° to 83° C)
- Maintenance** See Smart-Hose "Proper Use, Care & Maintenance" Booklet Form# 1999-1

	WP	Hose	Coupling		
ID	psi	Wt/Ft	Weight LL	Weight LL3	Part #
1"	250	.8 lb	2.5 lb		R34008140000
2"	250	1.5 lb		4.7 lb	R34016330000